

SUR-63

Cinema surround speaker

Whatever design you have in mind, MAG Cinema will surely surprise you. Starting with small and professional home cinemas and up to large-scale indoor and outdoor theaters, our surround speakers come in many shapes, sizes, and performance capabilities.


Based on our own carefully designed and fine-tuned components, our surround systems provide smooth operation and optimal coverage, and are approved to be used with latest 3D sound cinema standards.

With comprehensive range of installation accessories, including fittings and brackets, MAG Cinema speakers are easily mounted for quick overall installation times. Provided 7-year warranty, it is a kind of equipment you can rely on for years.

SUR-63 is designed for small and mid-sized multi-channel surround sound installations, featuring modern professional look. Easily mounted and connected, SUR-63 fits most cinema interior designs.



DIMENSIONS

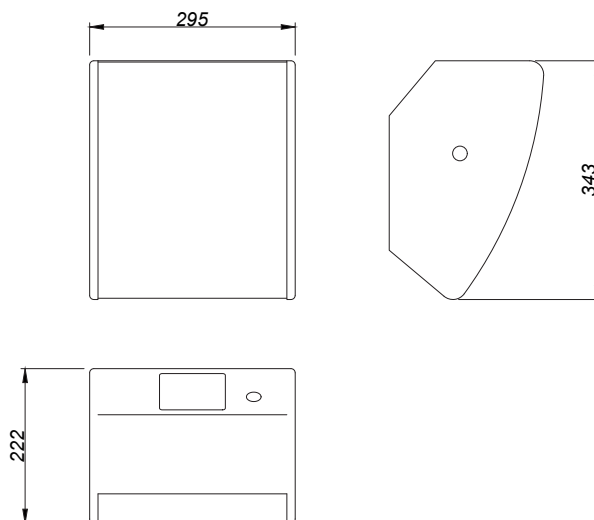

SPECIFICATIONS

| | |
|--|---|
| Frequency response (-6/+3) | 90 - 18000 Hz |
| Max continuous SPL ² | 114,5 dB |
| Sensitivity (1W/1m half-space) ¹ | 94 dB |
| Sensitivity (1W/1m free-space) ¹ | 91 dB |
| Drivers | 6" Coaxial |
| Nominal coverage | 100° x 100° |
| Front panel tilt angle | 15° (from vertical plane) |
| Nominal impedance | 4 Ohm (SUR-63-4) 8 Ohm (SUR-63-8) 16 Ohm (SUR-63-16) |
| Rated power ³ | 150 W |
| Connectors | Phoenix |
| Dimension (WxHxD) | 295x222x343 mm |
| Net weight | 6 kg |
| Gross weight | 7 kg |
| Mounting | 2x M10 mounting points 1x M10 safety point 4x M5 VESA 100x100 |
| Enclosure materials | Plywood, MDF, wear-resistant paint |
| Colour | Black |
| ¹ - dBSPL, IEC 60268-5 pink noise, 1W / 1m, half- and free- space | |
| ² - dBSPL RMS, IEC 60268-5 pink noise, measured on nominal power | |
| ³ - 2 hour power test, IEC filtered noise, 6 dB crest factor | |

SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone - this will reduce its resource dramatically. For fire safety do not install speaker system near open flames or heating elements.
2. Do not use speaker system with damaged speakON or speaker cable - this is an electric shock hazard and fire hazard.
3. Make sure the speaker system is firmly set up on ceiling, stage, or wall (where applicable).
4. While setting speaker system up on slope or slippery surface, make necessary arrangements to avoid its movement due to its vibration.
5. The speaker system is capable of delivering a significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.

CONNECTIONS

Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.

Do not exceed input powers, abovementioned in specifications, while exploiting the speaker system.

Speaker system comes with barrier strip screw terminal for connection to amplifier.

| | |
|-----------------------------|----------------------------------|
| Connection: | |
| Signal + | + Terminal |
| Signal - | - Terminal |
| High pass filter: | 90 Hz BW24 |
| Recommended amplifier power | 150 - 300 W on nominal impedance |