

SCR-225M


Cinema screen speaker

Whatever design you have in mind, MAG Cinema will surely surprise you. Starting with small and professional home cinemas and up to large-scale indoor and outdoor theaters, our surround speakers come in many shapes, sizes, and performance capabilities.

Based on our own carefully designed and fine-tuned components, our surround systems provide smooth operation and optimal coverage, and are approved to be used with latest 3D sound cinema standards.

SCR-225M is a great choice for mid-sized halls. It is equipped with perfectly balanced 2x15" LF and 1,5" drivers, and features HF section with tilt/pan function to perfectly align the radiation axis positioning. On top of that, bi-amp or full-range connection option allows for optimal power amplifier usage.

DIMENSIONS

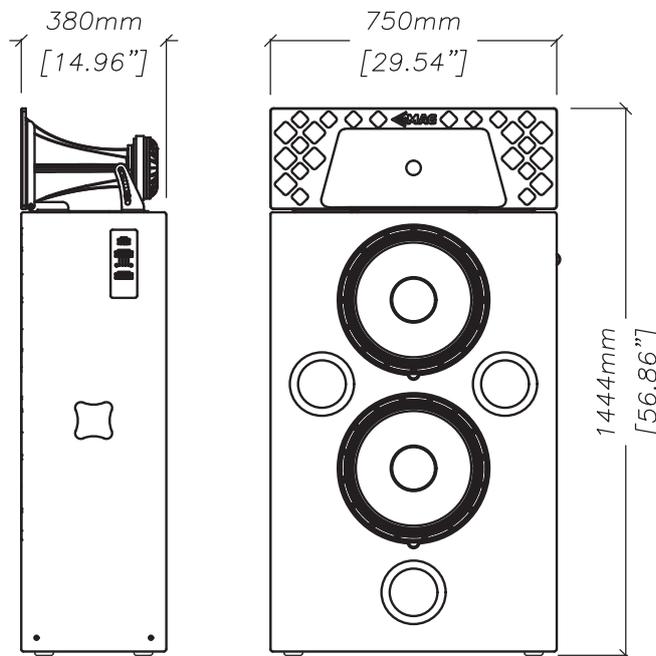

SPECIFICATIONS

Frequency response (-6/+3)	40 - 18000 Hz
Max continuous SPL ²	130 dB
Sensitivity (1W/1m half-space) ¹	100 dB full-range 100 dB LF / 110 HF biamp
Drivers	2x15" + 1,5"
Coverage Horizontal ³	70°-90° variable
Coverage Vertical ³	40°
HF section vertical tilt angle	-4° (up) - +16° (down)
HF section horizontal pan angle	-25° - +25°
Nominal impedance	4 Ohm full-range 4 Ohm LF / 8 Ohm HF biamp
Continuous program power	2000 W full-range 2000 W LF / 200 W HF biamp
Rated power ⁴	1000 W full-range 1000 W LF / 100 W HF biamp
Connectors	Phoenix
Recommended amplifier power	1000 - 2000 W full-range 1000 - 2000 W LF biamp 100 - 200 W HF biamp
Recommended high pass filter	LF 40 Hz BW24
Recommended crossover bi-amp	LF-HF 800 Hz LR24
Dimension (WxHxD)	750x1444x380 mm / 29,54"x56,86"x14,96"
Net weight	71,2 kg / 156,5 lbs
Gross weight	75,2 kg / 165,8 lbs
Mounting	4xM5 floor mounting
Enclosure materials	Plywood, MDF, wear-resistant paint
Colour	Black

CONNECTIONS

Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.

Do not exceed input powers, abovementioned in specifications, while exploiting the speaker system.

Speaker system comes with Phoenix socket for connection to amplifier.

See connection plate for details on correct bi-amp and tri-amp connection.

SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone - this will reduce its resource dramatically. For fire safety do not install speaker system near open flames or heating elements.

2. Do not use speaker system with damaged speakON or speaker cable - this is an electric shock hazard and fire hazard.

3. Make sure the speaker system is firmly set up on ceiling, stage, or wall (where applicable).

4. While setting speaker system up on slope or slippery surface, make necessary arrangements to avoid its movement due to its vibration.

5. The speaker system is capable of delivering a significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.