

# SCR-35L

Cinema  
screen speaker



Whatever design you have in mind, MAG Cinema will surely surprise you. Starting with small and professional home cinemas and up to large-scale indoor and outdoor theaters, our surround speakers come in many shapes, sizes, and performance capabilities.


Based on our own carefully designed and fine-tuned components, our surround systems provide smooth operation and optimal coverage, and are approved to be used with latest 3D sound cinema standards.

With comprehensive range of installation accessories, including fittings and brackets, MAG Cinema screen speakers are easily mounted for quick overall installation times. Provided 7-year warranty, it is a kind of equipment you can rely on for years.

Made for large halls with great SPL headroom requirement, the SCR-35L is mighty 3 x 15" + 2 x 8" + 1,5" screen speaker. MF-HF section is provided with pan/tilt function for precise positioning of sound beam. Its components were thoroughly optimized for less amplifier ratings and lower total project costs.



## DIMENSIONS

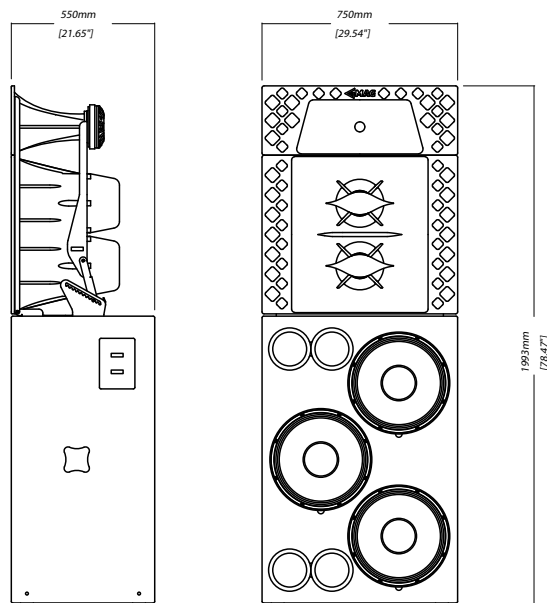

## CONNECTIONS

Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.

Do not exceed input powers, abovementioned in specifications, while exploiting the speaker system.

Speaker system comes with Phoenix socket for connection to amplifier.

See connection plate for details on correct bi-amp and tri-amp connection.

## SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone - this will reduce its resource dramatically. For fire safety do not install speaker system near open flames or heating elements.

2. Do not use speaker system with damaged speaker cable - this is an electric shock hazard and fire hazard.

3. Make sure the speaker system is firmly set up on ceiling, stage, or wall (where applicable).

4. While setting speaker system up on slope or slippery surface, make necessary arrangements to avoid its movement due to its vibration.

5. The speaker system is capable of delivering a significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.

## SPECIFICATIONS

Frequency response (-6/+3)	40 - 18000 Hz
Max continuous SPL <sup>2</sup>	132 dB
Sensitivity (1W/1m half-space) <sup>1</sup>	103,5 dB LF 106,5 dB MHF biamp 106,5 dB MF / 110 dB HF triamp
Drivers	3 x 15" + 2 x 8" + 1,5"
Coverage Horizontal <sup>3</sup>	70°-90° variable
Coverage Vertical <sup>3</sup>	40°
MHF section vertical tilt angle	-4° (up) - +16° (down)
MHF section horizontal pan angle	-25° - +25°
Nominal impedance	4 Ohm LF 4 Ohm MHF biamp 4 Ohm MF / 8 Ohm HF triamp
Rated power <sup>4</sup>	600 W LF 300 W MHF biamp 200 W MF / 100 W HF triamp
Connectors	Phoenix
Recommended amplifier power	600 - 1200 W LF 300 - 600 W MHF biamp 200 - 400 W MF triamp 100 - 200 W HF triamp
Recommended high pass filter	LF 40 Hz BW24
Recommended crossover bi-amp	LF-MHF 300Hz LR24
Recommended crossover tri-amp	LF-MF 300Hz LR24 MF-HF 800Hz LR24
Dimension (W x H x D)	750 x 1993 x 550 mm / 29,54" x 78,47" x 21,65"
Net weight	111,2 kg / 245,15 lbs
Gross weight	115,2 kg / 253,97 lbs
Mounting	4 x M5 floor mounting
Enclosure materials	Plywood, MDF, wear-resistant paint
Colour	Black

<sup>1</sup> - dB SPL, IEC 60268-5 pink noise, 1W / 1m

<sup>2</sup> - dB SPL RMS, IEC 60268-5 pink noise, measured on nominal power

<sup>3</sup> - The HF horn has a wider dispersion in the near-field and narrower in the far field. It has a 40° vertical coverage and a radiation axis aiming along the horizontal plane. At 20° up from axis speaker has a horizontal coverage of 70°. At 20° down from axis speaker has a horizontal coverage of 90°

<sup>4</sup> - 2 hour power test, IEC filtered noise, 6 dB crest factor

