
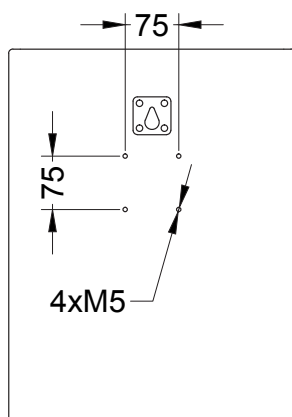
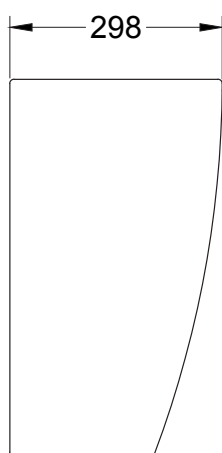


# SUR-20

## CINEMA SURROUND SPEAKER

SUR-20 offers significant sound pressure for large cinemas. Going as low as 50 Hz, powerful 500 W satellite speaker ensures that any viewer in any seat gets the drive and emotion intended by film director. Action!

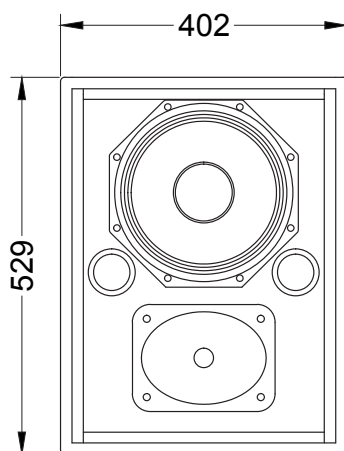

### Main features:

- 500W nominal power
- 10" woofer with 3" voice coil
- 1" HF driver with 1,75" voice coil
- 129 dB Max SPL
- Multiple mounting options

Frequency Response (-10dB)	50-18000 Hz
Max SPL (peak)	129 dB (calculated)
Sensitivity (1W/1m)	96 dB
LF Transducer	10", M1051
HF Transducer	1", M112
Nominal coverage H×V	90° × 55°
Impedance	8 Ohm / 16 Ohm
Nominal power (1)	500 W
Program power	1000 W
Peak power	2000 W

Connectors	2 terminal plate
Mounting options	4x M5 wall mounting points
Dimensions (W×H×D)	402×529×298 mm
Net weight	17 kg
Shipping weight	20 kg
Enclosure materials	MDF; wear-resistant paint
Grill	Steel grill, acoustically transparent foam
Color	Black

Acoustical & Electrical data

Connections, physical data  
and exploitation

(1) – Based on 2 hours power test, IEC filtered pink noise, 6 dB crest factor